

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
17 June 2004 (17.06.2004)


PCT

(10) International Publication Number
WO 2004/051307 A2

- (51) International Patent Classification⁷: **G01S 7/52** (74) Common Representative: **KONINKLIJKE PHILIPS ELECTRONICS N.V.**; c/o VODOPIA, John, P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).
- (21) International Application Number: **PCT/IB2003/005438**
- (22) International Filing Date:
13 November 2003 (13.11.2003)
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data:
60/430,396 3 December 2002 (03.12.2002) US
- (71) Applicant (for all designated States except US): **KONINKLIJKE PHILIPS ELECTRONICS N.V.** [NL/NL]; Groenewoudseweg 1, NL-5621 BA Eindhoven (NL).
- (72) Inventor: **ZIEL, Jonathan, Mark** [US/US]; P.O. Box 3001, Briarcliff Manor, NY 10510-8001 (US).
- (81) Designated States (*national*): AE, AG, AL, AM, AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ, DE, DK, DM, DZ, EC, EE, EG, ES, FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT, RO, RU, SC, SD, SE, SG, SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

[Continued on next page]

(54) Title: METHOD AND APPARATUS TO DISPLAY 3D RENDERED ULTRASOUND DATA ON AN ULTRASOUND CART IN STEREOVISION

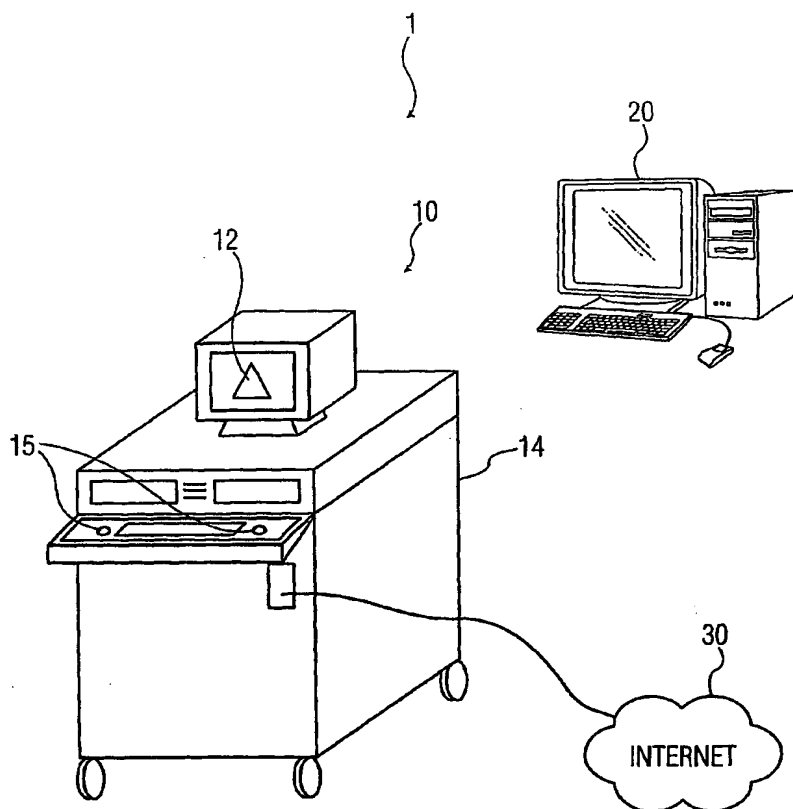

(57) Abstract: An ultrasound apparatus and method including an emitter to emit ultrasound signals, a receiver to receive reflected ultrasound signals, and a display unit to display a stereovision ultrasound image in real time from the reflected ultrasound signals. The apparatus also includes a generator to generate 3D ultrasound data volumes from the reflected ultrasound signals and a rendering processor to render the 3D ultrasound data volumes into first and second 2D images by streaming. A transport unit such as a cart houses the emitter, the receiver, the display unit, the rendering processor and the generator.